

POLYCAT

CONCRETE GROOVER

 **sima**
Pol. Juncaril, C/Albuñol, Parc. 250
18220 Albolote, Granada, Spain
Telf. +34 958 490 410
Fax: 34 958 466 645




ACCESORIES

R-0325177
HOUR METER / RPM
WATER PROOF - IP 68
PROGRAMMABLE WITH 3 MAINTENANCE PLANNING FUNCTIONS



CONFIGURABLE WORKING WIDTH

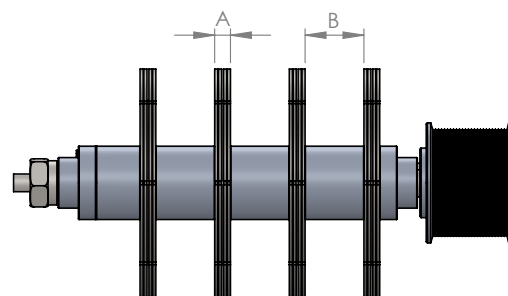

ENGINE: KOHLER CH395
ENGINE POWER: 7 KW (9.5 HP)
ENGINE R.P.M.: 3600
TRANSMISSION: POLY V
SUCTION INLET: SI
FUEL: PETROL
FUEL CONSUMPTION (L/H): 1
WORKING WIDTH (MM): CONFIGURABLE
DEPTH MAX: 18 MM
WEIGHT (KG): 75
DIMENSION (LXAXH) (MM): 1020X405X1150
PACKAGING (LXAXH) (MM): 780X470X800

POLYCAT

RECOMMENDED FOR CREATING NON-SLIP SURFACES, REMOVING DEBRIS AND LIQUIDS, AND FOR AN AESTHETIC GROOVING. USED IN AGRICULTURAL BUILDINGS AND ON PAVEMENTS.



 YouTube

