

# COBRA 45 PRO

**MULTI-BLADE FLOOR SAW**

**ALL IN ONE**

**Ø300 - Ø350 - Ø400 - Ø450 - Ø500**



R152018009900

## MICRO-TRENCHING AND JOINTS CUTTING


TRENCH 3 - 15MM WITH NO CENTER

3 BLADE Ø400 CONCRETE

2 ESPACERS 2.5 MM



**DOUBLE SEAL PROTECTION**  
REDUCES MAINTENANCE BY TWO SERVICE INTERVALS VS. TRADITIONAL ROAD CUTTERS

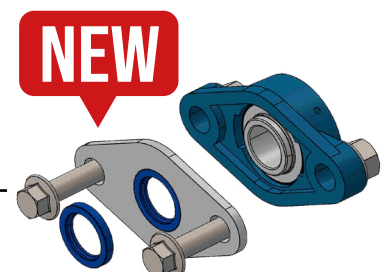

# ACCESORIES

# OUTPUT

# CUTTING DEPTH

**R-0325177**

**HOUR / RPM COUNTER**

**WATER PROOF - IP 68**

PROGRAMMABLE 3 MAINTENANCE ALERTS:

CLEAN AIR FILTER, OIL CHANGE, SVC.



**3 BLADES 15 MM**

**RUNS 45 CM / 1 MIN**

**1 BLADE 3 MM**

**RUNS 1 M / 1 MIN**

**BLADE PROF. M/S**

**Ø500MM / 185 MM 69**

**Ø450MM / 160 MM 62**

**Ø400MM / 135 MM 55**

**Ø350MM / 110 MM 48**


**Ø300MM / 85 MM 41**



**R152018009901**

**EASY & FAST BELT TENSIONER**

**BELTS REPLACEMENT AND TENSIONING IN 5 MIN. NO ENGINE MOVE OR PULLEYS ALIGNMENT REQUIRED.**

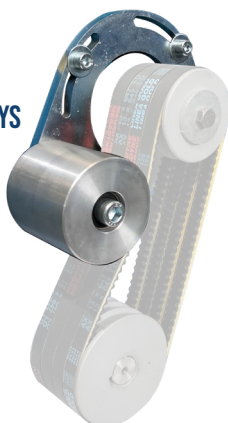

Motor	Honda GX 390 CYC	Kohler CH440 CYC	Elect. 3-Phase 400V
Fuel	Gasoline		Electric
Starter	Recoil		On / Off Switch
Power.	9,6 Kw / 13HP	10,3 Kw / 14HP	7,5 Kw / 10 Hp
Feed	Manual		
Ø Max blade	1 x Ø 500 / 3 x Ø 450 mm.		
Ø Bore.	Ø 25,4		
Blade location	Right side		
Water deposit	40 L / 10.5 Gl		
Blade cooling	2 blade side		
Nett weight	95 Kg / 209 Lb	103 Kg / 269 Lb	
Cutting depth control.	Heavy-duty gas shock absorber		
Dimensions LxAxH	1529" x 656" x 915" / 60" x 26" x 36"		



 YouTube

# COBRA 45 PRO VARIO

**MULTI-BLADE FLOOR SAW**

**ALL IN ONE**


**Ø300 - Ø350 - Ø400 - Ø450 - Ø500**



R152018009900


## MICRO-TRENCHING AND JOINTS CUTTING

TRENCH 3 - 15mm WITH NO CENTER  
3 BLADE Ø400 CONCRETE  
2 ESPACERS 2.5 MM

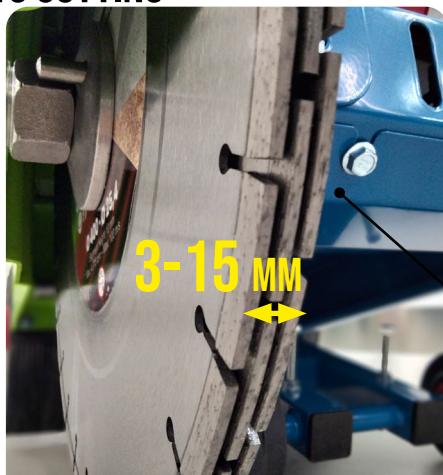

## DOUBLE SEAL PROTECTION

REDUCES MAINTENANCE BY TWO SERVICE INTERVALS VS. TRADITIONAL ROAD CUTTERS

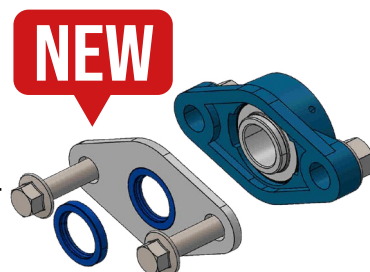

# ACCESORIES

**R-0325177**

**HOUR / RPM COUNTER**

**WATER PROOF - IP 68**

PROGRAMMABLE 3 MAINTENANCE ALERTS:


CLEAN AIR FILTER, OIL CHANGE, SVC.



**R152018009901**

**EASY & FAST BELT TENSIONER**

BELTS REPLACEMENT AND  
TENSIONING IN 5 MIN.  
NO ENGINE MOVE OR  
PULLEYS  
ALIGNMENT REQUIRED.

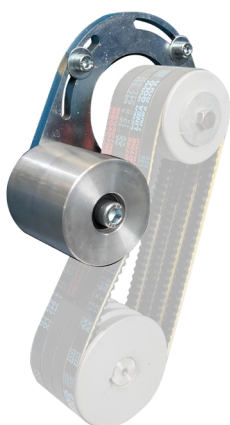

# OUTPUT

**3 BLADES 15 MM**  
**RUNS 45 CM / 1 MIN**

**2 BLADES 5 / 10 CM**  
**RUNS 1 M / 1 MIN**

**1 BLADE 3 MM**  
**RUNS 1 M / 1 MIN**

# CUTTING DEPTH

BLADE PROF.	M/S
Ø500MM / 185 MM	69
Ø450MM / 160 MM	62
Ø400MM / 135 MM	55
Ø350MM / 110 MM	48
Ø300MM / 85 MM	41



Motor	Honda GX 390 CYC	Kohler CH440 CYC	Elect. 3-Phase 400V
Fuel	Gasoline		Electric
Starter	Recoil		On / Off Switch
Power.	9,6 Kw / 13HP	10,3 Kw / 14HP	7,5 Kw / 10 Hp
Feed	Manual		
Ø Max blade	1 x Ø 500 / 3 x Ø 450 mm.		
Ø Bore.	Ø 25,4		
Blade location	Right side		
Water deposit	40 L / 10.5 GI		
Blade cooling	2 blade side		
Nett weight	106 Kg / 233 Lb	122 Kg / 269 Lb	
Cutting depth control.	Heavy-duty gas shock absorber		
Dimensions LxAxH	1529" x 656" x 915" / 60" x 26" x 36"		



YouTube