


# ACCESORIES

**R-0325177**  
**HOUR / RPM COUNTER**  
**WATER PROOF - IP 68**  
 PROGRAMMABLE 3 MAINTENANCE ALERTS:  
 CLEAN AIR FILTER, OIL CHANGE, SVC.



**R152018009901**  
**EASY & FAST BELT TENSIONER**

BELTS REPLACEMENT AND  
 TENSIONING IN 5 MIN.  
 NO ENGINE MOVE OR PULLEYS  
 ALIGNMENT REQUIRED.

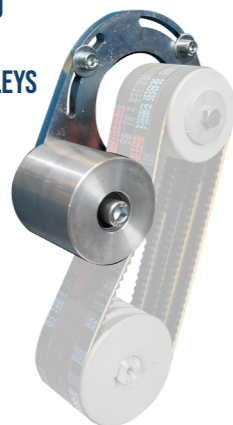

# OUTPUT

**3 BLADES 15 MM**  
**RUNS 45 CM / 1 MIN**

**1 BLADE 3 MM**  
**RUNS 1 M / 1 MIN**

# CUTTING DEPTH

| BLADE  | PROF.    | M/S |
|--------|----------|-----|
| Ø500MM | / 185 MM | 69  |
| Ø450MM | / 160 MM | 62  |
| Ø400MM | / 135 MM | 55  |
| Ø350MM | / 110 MM | 48  |
| Ø300MM | / 85 MM  | 41  |



|                        |                                       |                     |                        |
|------------------------|---------------------------------------|---------------------|------------------------|
| Motor                  | Honda GX 390<br>CYC                   | Kohler CH440<br>CYC | Elect. 3-Phase<br>400V |
| Fuel                   | Gasoline                              |                     | Electric               |
| Starter                | Recoil                                |                     | On / Off Switch        |
| Power.                 | 9,6 Kw / 13HP                         | 10,3 Kw / 14HP      | 7,5 Kw / 10 Hp         |
| Feed                   | Manual                                |                     |                        |
| Ø Max blade            | 1 x Ø 500 / 3 x Ø 450 mm.             |                     |                        |
| Ø Bore.                | Ø 25,4                                |                     |                        |
| Blade location         | Right side                            |                     |                        |
| Water deposit          | 40 L / 10.5 Gl                        |                     |                        |
| Blade cooling          | 2 blade side                          |                     |                        |
| Nett weight            | 95 Kg / 209 Lb                        | 103 Kg / 269 Lb     |                        |
| Cutting depth control. | Heavy-duty gas shock absorber         |                     |                        |
| Dimensions LxAxH       | 1529" x 656" x 915" / 60" x 26" x 36" |                     |                        |



# COBRA 45 PRO



## MULTI-BLADE FLOOR SAW

**ALL IN ONE**

**Ø300 - Ø350 - Ø400 - Ø450 - Ø500**



**SPECIAL KIT:**  
**MICRO-TRENCHING AND JOINTS CUTTING**

**R152018009900**  
**TRENCH 15MM WITH NO**  
**CENTER**  
**3 BLADES Ø400 MM CONCRE-**



Pol. Juncaril, C/Albuñol, Parc. 250  
 18220 Albolote, Granada, Spain  
 Telf. +34 958 490 410  
 Fax: 34 958 466 645

